

Round ground-recessed luminaire for outdoor installation, Phosphochromatised and polyester powder coated die-cast copper-free aluminium body and stainless steel AISI 304 frame, tempered safety glass, moulded silicone gasket. Built-in LED driver 220-240V 50-60Hz, with 5 CREE XP-G3 LED. IP67 rating.



Energy Label A++

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- Stainless steel AISI 304 ring.
- NR. 5 x 1.5W CREE "XP-G3" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.
- Max static weight resistance 5.000 Kg
- Protection against impact IK10 (20 joule)
- M20 cable gland.
- Adjustable +/- 15 degrees.
- Polypropilene recessing box included.
- 1 mt. neoprene power cable included



1...10 V **DALI**
1-10 V DIMMABLE / DALI VERSION
AVAILABLE ON REQUEST

FULL RGB
AVAILABLE ON REQUEST

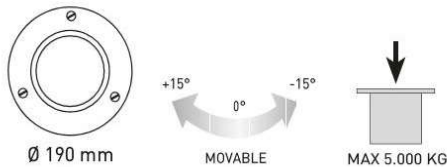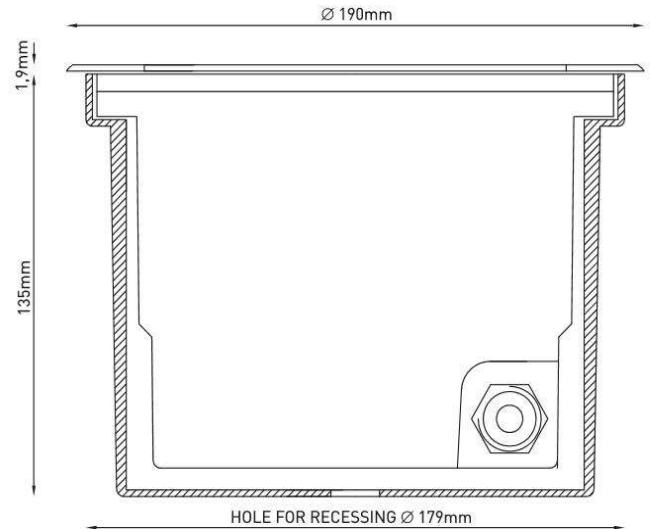

8 WATT
220-240V 50-60HZ ELECTRONIC
IP67
2.20 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	M 10°	720	90.00	STAINLESS STEEL
		M 30°	684	85.50	
		M 45°	650	81.25	
	4.000°K NEUTRAL-WHITE	M 10°	750	93.75	
		M 30°	713	89.13	
		M 45°	677	84.63	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ● BLUE